

CAP 4 Slim design 90°

Technical Data



Caractéristiques techniques / Technische Daten

		ER- 25A / 16 mm
R.P.M max	Heavy duty bearings	4.000
		12 Kg
		1:1
KW		7 Kw
Nm max		35 Nm
Rotation		in = out (A-C) in ≠ out (B)

L / H

Other measures under request

Autres mesures sur demande
Weitere Maßnahmen auf Anfrage

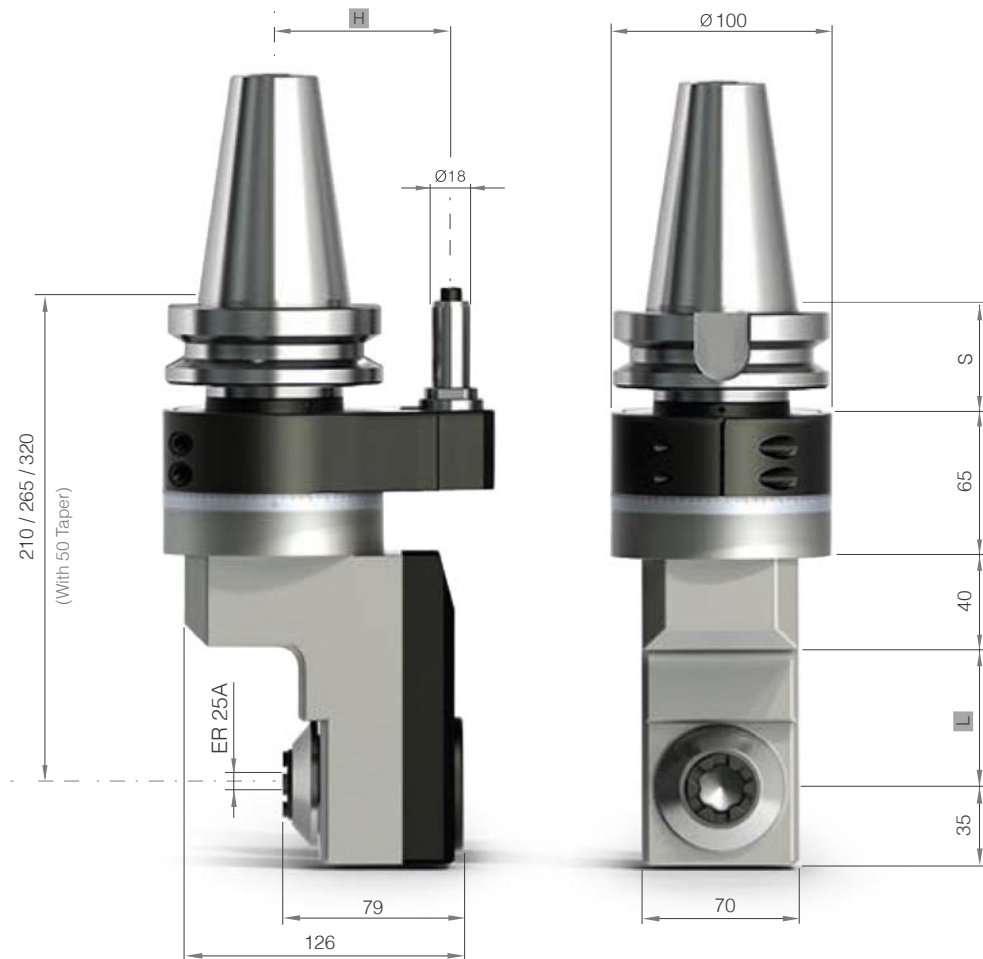


MADAULA
creative solutions

L	A	65
	B	120
	C	175

Taper Cône / Kegel	Size Taille / Größe	H	S
-----------------------	------------------------	---	---

DIN 69871 / 2080	50	80	40
CAT	50	80	40
MAS-BT	50	80	50
HSK	80/100	80	40/50
CAPTO	C8	80	50
KM	80/100	80	40/50

Standard Equipment
Standard / Standard



Optional Equipment
Optionel / Option

Stop Block
Bloc d'arrêt / Anschlag-Block

See page 51 

Collets
Pincés / Spannzangen

See page 52 

Coolant through index pin
Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max
Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

8.000